


■DESCRIPTION

The C-VD6 is a video distributor for use in color or black and white camera systems. It distributes one video signal to 6 outputs, or two different signals to each of 3 outputs, and can monitor the camera image on plural video monitors simultaneously.


■SPECIFICATIONS

Power Requirements	230 V AC, 50/60 Hz
Power Consumption	4.5 W (5.4 VA)
Video Inputs	1 V (p-p) 75 Ω (BNC) 2 inputs
Video Outputs	1 V (p-p) 75 Ω (BNC) 6 outputs
Distribution	One input to 6 outputs, or 2 different inputs to each of 3 outputs (switchable)
Ambient Temperature	-10 °C to 50 °C
Finish	Panel: Semi-glazed melamine baked paint (black)
Dimensions(WXHXD)	210 (8.27") X46 (1.81") X296 (11.65") mm
Weight	1.8 kg (4.0 lb.)
Option	Optional rack mounting bracket MB-15B-J for two units Optional rack mounting bracket MB-15B-BK for one unit


■APPEARANCE

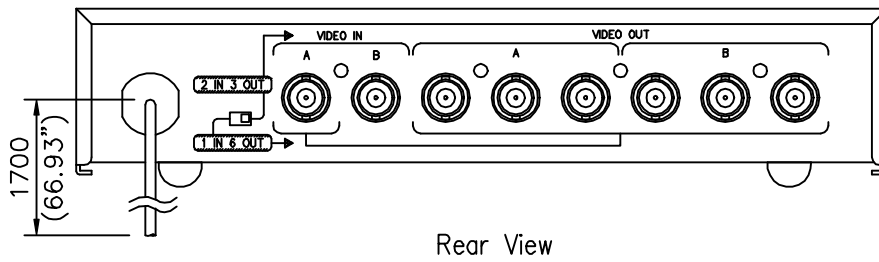

Rear View

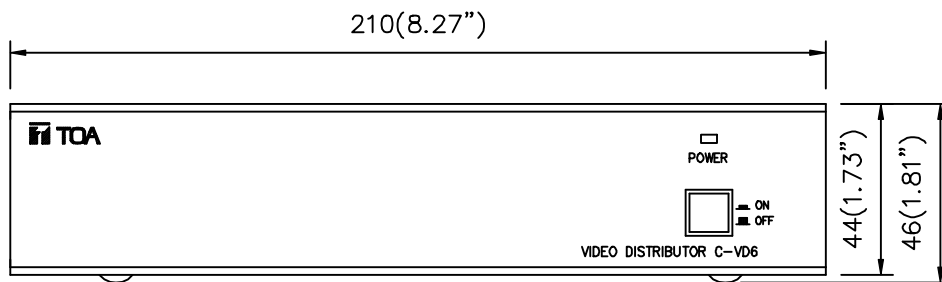

Front View

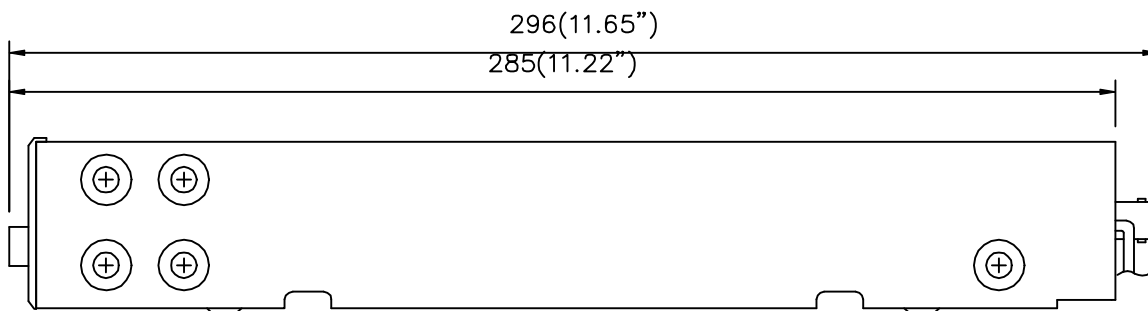

Side View

UNIT:mm SCALE:1/2