

4 Channel H.264 Network DVR with DVD Writer

C-MPH04


Primary features

- H.264 Compression
- Built in DVR Writer
- IR Remote Control
- Audio 4 In 1 Out
- Simultaneous Live Playback
- VGA Monitor Out
- BNC Main Monitor Out
- BNC Spot Monitor Out
- Alarms
- SATA Drive
- Various HDD sizes available:
C-MP04/500GB - (500GB), C-MP04/1TB - (1TB)

C-MPH04

4 Channel Network DVR with DVD Writer

Specifications

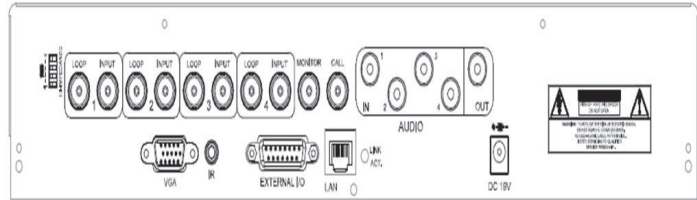

- | | |
|---|---|
| <ul style="list-style-type: none"> ▶ Video System: NTSC / PAL (auto detection) ▶ Video Compression Format: H.264 ▶ Video Input: 4 Channels (Composite video signal 1 Vp-p 75Ω BNC) ▶ Video Loop Output: 4 Channels (Composite video signal 1 Vp-p 75Ω BNC) ▶ Video Output (BNC): Main Monitor Output: for stable display
Call Monitor Output: for sequence display ▶ Video Output (VGA): Built-in VGA output for LCD monitor ▶ Audio Input: 4 Channels (Mono) ▶ Audio Output: 1 Channel (Mono) ▶ Multiplex Operating: Supports live display, recording, playback, backup, and network simultaneously ▶ Maximum Recording Rate (Frame):
30 IPS @ 720x480 <NTSC>
25 IPS @ 720x576 <PAL> ▶ Maximum Recording Rate (Field):
60 IPS @ 720x240 <NTSC>
50 IPS @ 720x288 <PAL> ▶ Maximum Recording Rate (CIF):
120 IPS @ 352x240 <NTSC>
100 IPS @ 352x288 <PAL> ▶ Recording Mode: Manual / Timer / Motion / Alarm / Remote ▶ Recording Quality Options: Super Best, Best, High & Normal ▶ Pre-alarm Recording: YES (8 MB) ▶ HDD Type: Accommodates 1 SATA HDD ▶ HDD Storage: Supports Maximum HDD Capacity to 1 Tera Byte ▶ HDD Quick Cleaning: Deletes HDD Data Efficiently (1TB within 2 seconds) ▶ Quick Search : Time / Motion / Alarm search mode ▶ USB Flash Drive Backup: Yes ▶ DVD Writer Backup: Yes ▶ Playback on PC: Windows Media Player compatible | <ul style="list-style-type: none"> ▶ Network Transfer Format: H.264 ▶ Ethernet: 10/100 Base-T. ▶ Network Protocol: TCP/IP, PPPOE, DHCP and DDNS (Dynamic IP) ▶ Network Surveillance Interface: Licensed software "Video Viewer" / Internet Explorer or Mozilla Firefox web browser / QuickTime player ▶ Independent Network: Basic independent ▶ Network Alarm Notification: E-mail and FTP server ▶ CMS (Central Management System): Yes (Maximum: 16 different IPs) ▶ Network E-map Function: Customized map for IP selection ▶ R.E.T.R. (Remote Event Trigger Recording): Yes ▶ Operating System for Network Function: Windows Vista / XP / 2000; Apple MAC OS ▶ IR Remote Control: Yes ▶ Multilingual OSD: Yes ▶ Motion Detection Area: 16 x 12 grids per channel ▶ Motion Detection Sensitivity: 4 adjustable parameters for accurate detection ▶ PTZ Control: YES (Pelco-D & Pelco-P) ▶ External Alarm: 4 inputs, 1 output ▶ Picture Zoom: 2X digital zoom ▶ Key Lock (Password Protection): Yes ▶ Video Loss Detection: Yes ▶ Camera Title: Supports up to 6 letters ▶ Video Adjustable: Hue / Color / Contrast / Brightness ▶ Date Display Format: YY/MM/DD, DD/MM/YY, MM/DD/YY ▶ Daylight Saving: Yes ▶ Power Source (±10%): DC 19V ▶ Power Consumption (±10%): < 42 W ▶ Operating Temperature: 10 ~ 40° (50°~104°) ▶ Dimensions (mm)**: 375(W) x 61 (H) x 281 (D) ▶ System Recovery: System auto recovery after power failure ▶ Optional Peripherals: Keyboard controller |
|---|---|
- Warranty
- ▶ Warranty Period: 3 Years

** Dimensional tolerance: ±5mm