

Online



Batteries

Online offer a comprehensive range of quality sealed lead acid batteries ideal for use in any standby or cyclic application. Designed to operate for up to 5 years in standby use in normal service conditions, the batteries have a shelf life of up to one year without permanent loss of discharge.

Online sealed lead acid batteries are ideal for use in any standby or cyclic application.


Emergency Lighting Systems • Fire and Security Systems • Burglar Alarm Systems • UPS Systems • Power Tools • Electronic Test Equipment • Telephone and Telecommunications Equipment • Cash Registers • Control Equipment • Medical Electronic Equipment • Portable TVs

- Maintenance Free
- Leak Proof
- Long Life
- Use in any Position
- Low Self Discharge
- High Discharge Rate
- High Recovery Capability
- Wide Operating Temperature

Lyntek Ltd, Churchill Way, Nelson, Lancashire BB9 6RT email: sales@lyntek.co.uk
www.lyntek.co.uk Tel: 01282 717 490 Fax: 01282 698 020
Technical Support (Mon-Fri 9am-5pm): 0906 711 2329 (calls charged at 50p per minute)
Company policy is one of continuous improvement,
we reserve the right to change specification without prior notice.



Online SEALED LEAD ACID BATTERIES

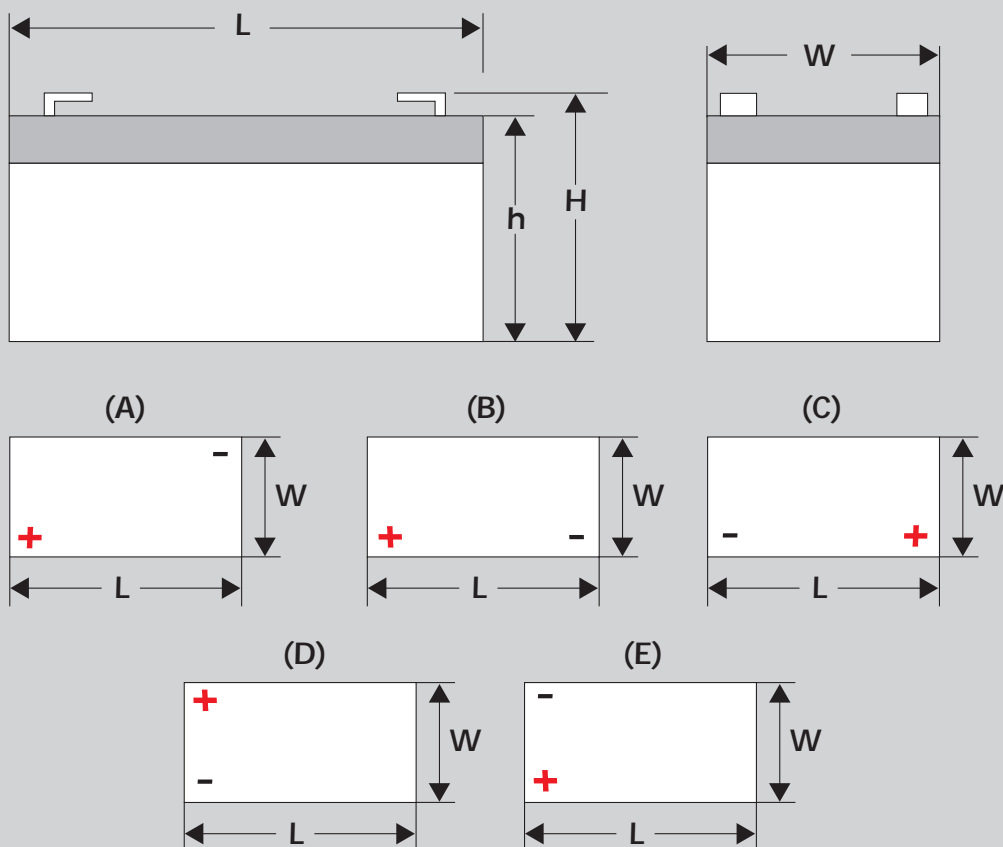

Lyntek Code	Model	Voltage	Capacity	Dimensions (mm)				Approx. Weight	Terminal Position	Standard Terminal Type
				L	W	h	H			
LY11-030-15	OL1.3-6	6	1.3Ah	97±1	25±1	51±2	57±2	0.30 Kg	(B)	Faston
LY11-033-18	OL3.3-6	6	3.3Ah	134±1	34±1	60±2	66±2	0.68 Kg	(B)	Faston
LY11-034-19	OL4.2-6	6	4.2Ah	70±1	48±1	101±2	107±2	0.84 Kg	(A)	Faston
LY11-038-23	OL10-6	6	10Ah	151±1	51±1	94±2	100±2	1.80 Kg	(B)	Faston
LY11-039-24	OL12-6	6	12Ah	151±1	51±1	94±2	100±2	1.94 Kg	(B)	Faston
LY11-042-19	OL1.3-12	12	1.3Ah	97±1	43±1	52±2	57±2	0.58 Kg	(E)	Faston
LY11-044-21	OL2.2-12	12	2.2Ah	178±1	34±1	60±2	66±2	1.00 Kg	(B)	Faston
LY11-045-22	OL3.3-12	12	3.3Ah	134±1	67±1	60±2	66±2	1.30 Kg	(D)	Faston
LY11-046-23	OL4.2-12	12	4.2Ah	90±1	70±1	100±2	106±2	1.65 Kg	(B)	Faston
LY11-047-24	OL7.2-12	12	7.2Ah	151±1	65±1	95±2	101±2	2.55 Kg	(D)	Faston
LY11-048-25	OL12-12	12	12Ah	151±1	99±1	96±2	101±2	3.94 Kg	(D)	Faston
LY11-049-26	OL18-12	12	18Ah	181±1	77±1	167±2	167±2	6.10 Kg	(C)	Bolt & Nut
LY11-050-27	OL26-12	12	26Ah	175±11	166±1	126±2	126±2	9.50 Kg	(C)	Bolt & Nut
LY11-059-28	OL40-12	12	40Ah	197±2	166±2	170±2	170±2	13.00 Kg	N/A	6mm Stud
LY11-060-21	OL65-12	12	65Ah	348±3	167±2	178±2	178±2	23.50 Kg	N/A	6mm Stud
LY11-061-22	OL100-12	12	100Ah	330±2	172±2	215±2	223±2	32.00 Kg	N/A	6mm Stud